





FEMMINA DIRITTA - CONO 60° O.R. DADO SFILABILE FILETTO GAS CILINDRICO	DKOR 60° KONUS MIT O-RING (BSP GEWINDE) HINTERLEGTE MUTTER	BSP O-RING FEMALE 60° CONE (SLIP-ON NUT)	RACCORD FEMELLE DROITE CONE 60° O.R. ECROU DETACHABLE FILETAGE BSP CYLINDRIQUE	RACOR HEMBRA DERECHA CONO 60° O.R. TUERCA SEPARABLE ROSCA CILÍNDRICA DE GAS						
		CODICE ZEICHEN REFERENCE DESCRIPTION CODIGO	Ø Tubo Rohr ID - Hose I.D. Ø Tube - Ø Tubo		Ø F	CH	Ø d	M	H	L ≈
			Pollici (1)	mm						
		600550404	1/4	6	1/4	19	4	5,4	17	50
		600550606	3/8	10	3/8	22	7	6	20,5	54
		600550808	1/2	13	1/2	27	10	6,5	22,5	58
		600551212 (2)	3/4	19	3/4	32	15,5	7,5	25,5	72
		600551616 (2)	1"	25	1"	38	20	10	26,5	89
		600552016 (3)	1"	25	1" 1/4	50	20	11,5	32,5	96,5
		600552020 (3)	1" 1/4	32	1" 1/4	50	26	11,5	33	102,5
		600552424 (3)	1" 1/2	38	1" 1/2	55	32	11	35	116
600553232 (3)	2"	50	2"	70	44	16	31	121,5		

(1) Zoll - Inches - Pouces - Pulgadas

(2) Dado graffato - Pressmutter - Crimped back nut - Ecrou agrafé - Tuerca suetada con grapa

(3) Dado spinato - Gestiftete mutter - Thrust wire nut - Ecrou à cheville - Tuerca sujeta con perno

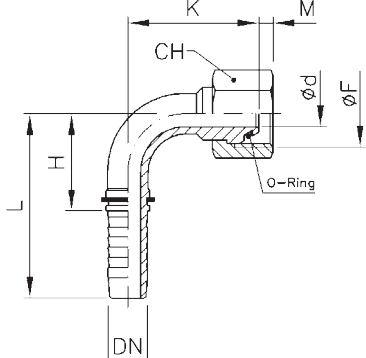FEMMINA CURVA 90° CONO 60° O.R. DADO SFILABILE FILETTO GAS CILINDRICO	DKOR 90° BOGEN 60° KONUS MIT O-RING (BSP GEWINDE) HINTERLEGTE MUTTER	90° BSP O-RING FEMALE ELBOW 60° CONE (SLIP-ON NUT)	RACCORD FEMELLE TORDUE 90° CONE 60° O.R. ECROU DETACHABLE FILETAGE BSP CYLINDRIQUE	RACOR HEMBRA CURVA 90° CONO 60° O.R. TUERCA SEPARABLE ROSCA CILÍNDRICA DE GAS							
		CODICE ZEICHEN REFERENCE DESCRIPTION CODIGO	Ø Tubo Rohr ID - Hose I.D. Ø Tube - Ø Tubo		Ø F	CH	Ø d	M	K ≈	H ≈	L ≈
			Pollici (1)	mm							
		600560404	1/4	6	1/4	19	4	5,4	28	23	50,5
		600560606	3/8	10	3/8	22	7	6	37	30,5	59
		600560808	1/2	13	1/2	27	10	6,5	43,5	38	68
		600561212 (2)	3/4	19	3/4	32	15,5	7,5	58	54	93
		600561616 (2)	1"	25	1"	38	20	10	70,5	74	126,5
		600562016 (3)	1"	25	1" 1/4	50	20	11,5	78,5	74	126,5
		600562020 (3)	1" 1/4	32	1" 1/4	50	26	11,5	88,5	80	140
		600562424 (3)	1" 1/2	38	1" 1/2	55	32	11	103,5	93	163
		600563232 (3)	2"	50	2"	70	44	16	124	129	203,5

(1) Zoll - Inches - Pouces - Pulgadas

(2) Dado graffato - Pressmutter - Crimped back nut - Ecrou agrafé - Tuerca suetada con grapa

(3) Dado spinato - Gestiftete mutter - Thrust wire nut - Ecrou à cheville - Tuerca sujeta con perno

FEMMINA CURVA 45° CONO 60° O.R. DADO SFILABILE FILETTO GAS CILINDRICO	DKOR 45° BOGEN 60° KONUS MIT O-RING (BSP GEWINDE) HINTERLEGTE MUTTER	45° BSP O-RING FEMALE ELBOW 60° CONE (SLIP-ON NUT)	RACCORD FEMELLE TORDUE 45°CÔNE 60° O.R. ÉCROU DÉTACHABLE FILETAGE BSP CYLINDRIQUE	RACOR HEMBRA CURVA 45° CONO 60° O.R. TUERCA SEPARABLE ROSCA CILÍNDRICA DE GAS							
		CODICE ZEICHEN REFERENCE DESCRIPTION CODIGO	Ø Tubo Rohr ID - Hose I.D. Ø Tube - Ø Tubo		Ø F	CH	Ø d	M	K ≈	H ≈	L ≈
			Pollici (1)	mm							
		600570404	1/4	6	1/4	19	4	5,4	14,5	37,5	65
		600570606	3/8	10	3/8	22	7	6	19	50	78,5
		600570808	1/2	13	1/2	27	10	6,5	21,5	62	92
		600571212 (2)	3/4	19	3/4	32	15,5	7,5	28	64	103
		600571616 (2)	1"	25	1"	38	20	10	33	85	137,5
		600572016 (3)	1"	25	1" 1/4	50	20	11,5	39	90,5	143
		600572020 (3)	1" 1/4	32	1" 1/4	50	26	11,5	42	99,5	159,5
		600572424 (3)	1" 1/2	38	1" 1/2	55	32	11	48	112	182
		600573232 (3)	2"	50	2"	70	44	16	52,5	132,5	207